


WIRE DUCT

The panel building market has very specific needs. Betaduct is a unique cable management system developed specifically for use within cabinets and control panels. Betaduct is available in a number of different colors and sizes. Select Open, Narrow, Closed Slot, and Solid Wall (RaceWay) duct depending on your application.

- Industrial Grade Material**
- Made of self-extinguishing PVC
 - UL94 Flammability rating V-0
 - Service temperature 5°F to 140°F (-15°C to 60°C)
 - UL, CSA, CE, and Lloyds Register approved

Score line
Fingers can be easily removed without the need for tools

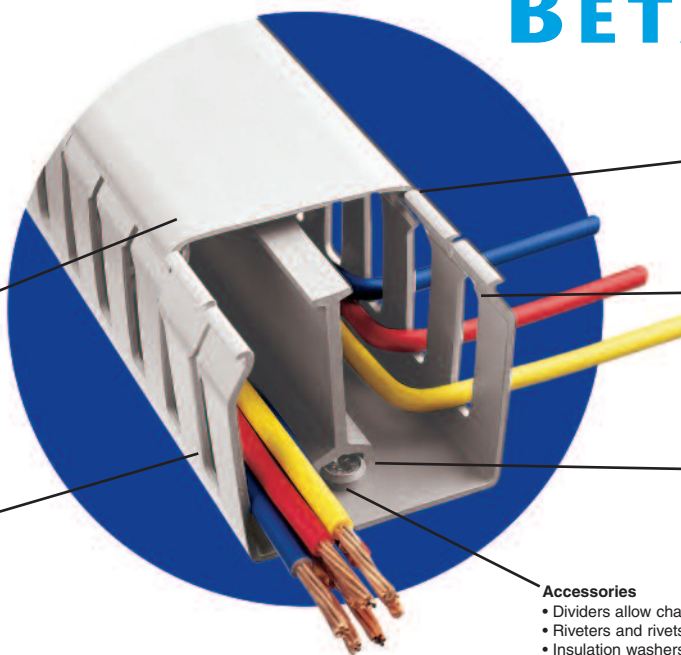

BETADUCT




Lid Retention
Friction bead on wider duct provides excellent lid retention to resist vibration

Cable Retention
Wiring duct design allows cables to be retained during installation, making routing and cable termination a simple process

Easy Installation
Base slots are to DIN 43659 standard providing flexibility for easy installation

- Accessories**
- Dividers allow channel separation within single duct
 - Riveters and rivets allow for quick fastening and installation
 - Insulation washers provide location for dividers to be secured to base of wiring duct

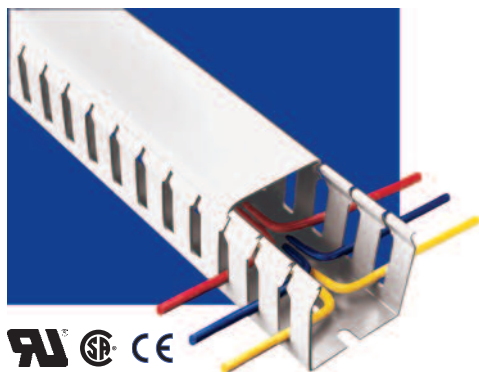

G-series Wide Slot Wiring Duct

from **\$13.10** per stick

- Wide fingers giving additional cable support
- Smooth edges for worry-free wiring and handling
- Terminated wires can be re-routed easily
- Scoreline at base of finger allows removal without the need for tools
- Made of self extinguishing rigid PVC
- UL94 Flammability rating V-0
- Service temperature 5°F to 140°F (-15°C to 60°C)
- 0.79" slot pitch, 0.31" slot width
- 23 sizes available in gray (RAL 7030), white, black, or blue
- Cover included with duct
- Dividers and many other optional accessories available


| Size | External Dimensions | | Carton Qty. | | Gray | | White | | Black | | Blue | |
|-----------------|---------------------|------------|-------------------|-----------|------------------|-------|------------------|-------|------------------|-------|----------------|-------|
| (W x H) | W in (mm) | H in (mm) | Lengths (6.5 ft.) | Total ft. | Part Number | Price | Part Number | Price | Part Number | Price | Part Number | Price |
| 3/4" x 2" | 0.98"(25) | 2.09"(53) | 12 | 78 | BG.75X2LG6.5-C | \$168 | BG.75X2WH6.5-C | \$168 | BG.75X2BL6.5-C | \$168 | | |
| 1" x 1 1/2" | 1.14"(29) | 1.61"(41) | 12 | 78 | BG1X1.5LG6.5-C | \$157 | BG1X1.5WH6.5-C | \$157 | BG1X1.5BL6.5-C | \$157 | | |
| 1" x 2" | 1.14"(29) | 2.13"(54) | 12 | 78 | BG1X2LG6.5-C | \$170 | BG1X2WH6.5-C | \$170 | BG1X2BL6.5-C | \$170 | BG1X2IB6.5-C | \$242 |
| 1" x 3" | 1.14"(29) | 3.11"(79) | 8 | 52 | BG1X3LG6.5-C | \$141 | BG1X3WH6.5-C | \$141 | BG1X3BL6.5-C | \$141 | BG1X3IB6.5-C | \$197 |
| 1" x 4" | 1.18"(30) | 4.13"(105) | 8 | 52 | BG1X4LG6.5-C | \$164 | BG1X4WH6.5-C | \$164 | BG1X4BL6.5-C | \$164 | BG1X4IB6.5-C | \$228 |
| 1 1/2" x 1 1/2" | 1.61"(41) | 1.61"(41) | 12 | 78 | BG1.5X1.5LG6.5-C | \$175 | BG1.5X1.5WH6.5-C | \$175 | BG1.5X1.5BL6.5-C | \$175 | | |
| 1 1/2" x 2" | 1.61"(41) | 2.13"(54) | 8 | 52 | BG1.5X2LG6.5-C | \$133 | BG1.5X2WH6.5-C | \$133 | BG1.5X2BL6.5-C | \$133 | BG1.5X2IB6.5-C | \$207 |
| 1 1/2" x 3" | 1.54"(39) | 3.11"(79) | 8 | 52 | BG1.5X3LG6.5-C | \$158 | BG1.5X3WH6.5-C | \$158 | BG1.5X3BL6.5-C | \$158 | BG1.5X3IB6.5-C | \$238 |
| 1 1/2" x 4" | 1.69"(43) | 4.13"(105) | 8 | 52 | BG1.5X4LG6.5-C | \$176 | BG1.5X4WH6.5-C | \$176 | BG1.5X4BL6.5-C | \$176 | BG1.5X4IB6.5-C | \$275 |
| 2" x 1" | 2.13"(54) | 1.10"(28) | 12 | 78 | BG2X1LG6.5-C | \$193 | BG2X1WH6.5-C | \$193 | BG2X1BL6.5-C | \$193 | | |
| 2" x 1 1/2" | 2.13"(54) | 1.61"(41) | 8 | 52 | BG2X1.5LG6.5-C | \$130 | BG2X1.5WH6.5-C | \$130 | BG2X1.5BL6.5-C | \$130 | | |
| 2" x 2" | 2.13"(54) | 2.13"(54) | 8 | 52 | BG2X2LG6.5-C | \$133 | BG2X2WH6.5-C | \$133 | BG2X2BL6.5-C | \$133 | BG2X2IB6.5-C | \$186 |
| 2" x 3" | 2.17"(55) | 3.11"(79) | 8 | 52 | BG2X3LG6.5-C | \$164 | BG2X3WH6.5-C | \$164 | BG2X3BL6.5-C | \$164 | BG2X3IB6.5-C | \$239 |
| 2" x 4" | 2.20"(56) | 4.13"(105) | 4 | 26 | BG2X4LG6.5-C | \$93 | BG2X4WH6.5-C | \$93 | BG2X4BL6.5-C | \$93 | BG2X4IB6.5-C | \$138 |
| 3" x 1 1/2" | 3.15"(80) | 1.61"(41) | 8 | 52 | BG3X1.5LG6.5-C | \$164 | BG3X1.5WH6.5-C | \$164 | BG3X1.5BL6.5-C | \$164 | | |
| 3" x 2" | 3.07"(78) | 2.13"(54) | 8 | 52 | BG3X2LG6.5-C | \$169 | BG3X2WH6.5-C | \$169 | BG3X2BL6.5-C | \$169 | | |
| 3" x 3" | 3.15"(80) | 3.15"(80) | 8 | 52 | BG3X3LG6.5-C | \$198 | BG3X3WH6.5-C | \$198 | BG3X3BL6.5-C | \$198 | BG3X3IB6.5-C | \$268 |
| 3" x 4" | 3.15"(80) | 4.13"(105) | 4 | 26 | BG3X4LG6.5-C | \$114 | BG3X4WH6.5-C | \$114 | BG3X4BL6.5-C | \$114 | BG3X4IB6.5-C | \$158 |
| 4" x 2" | 4.21"(107) | 2.13"(54) | 4 | 26 | BG4X2LG6.5-C | \$98 | BG4X2WH6.5-C | \$98 | BG4X2BL6.5-C | \$98 | | |
| 4" x 3" | 4.21"(107) | 3.15"(80) | 4 | 26 | BG4X3LG6.5-C | \$111 | BG4X3WH6.5-C | \$111 | BG4X3BL6.5-C | \$111 | BG4X3IB6.5-C | \$175 |
| 4" x 4" | 4.21"(107) | 4.09"(104) | 4 | 26 | BG4X4LG6.5-C | \$130 | BG4X4WH6.5-C | \$130 | BG4X4BL6.5-C | \$130 | BG4X4IB6.5-C | \$194 |
| 4" x 5" | 4.21"(107) | 5.12"(130) | 4 | 26 | BG4X5LG6.5-C | \$175 | BG4X5WH6.5-C | \$175 | BG4X5BL6.5-C | \$175 | | |
| 5" x 3" | 5.16"(131) | 3.07"(78) | 4 | 26 | BG5X3LG6.5-C | \$172 | BG5X3WH6.5-C | \$172 | BG5X3BL6.5-C | \$172 | | |

To order call 1.800.972.0436 or visit factorymation.com

No Games, No Gimmicks...
...Just Great Products at Great Prices!!!

F-series Narrow Slot Wiring Duct

from **\$13.10** per stick

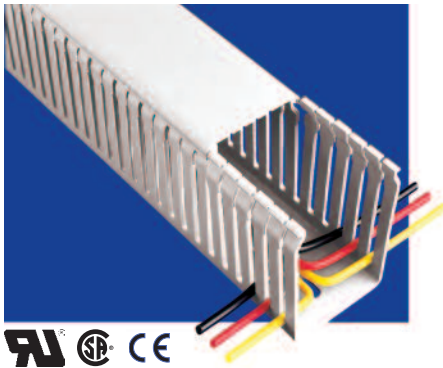


- Ideal for use with high-density narrow terminal blocks where more access is required
- Improve appearance of panels with cables out in best position
- Scoreline at base of finger allows removal without the need for tools
- Made of self extinguishing rigid PVC with UL94 Flammability rating V-0
- Service temp. 5°F to 140°F (-15°C to 60°C)
- 0.39" slot pitch, 0.16" slot width
- 20 sizes in gray (RAL 7030), white, or black
- Cover included with duct
- Dividers and many other accessories available

| Size (W x H) | External Dimen. | | Carton Qty. | | Gray | White | Price |
|-----------------|-----------------|------------|-------------------|-----------|------------------|------------------|-------|
| | W in (mm) | H in (mm) | Lengths (6.5 ft.) | Total ft. | Part Number | Part Number | |
| 3/4" x 2" | 0.98"(25) | 2.09"(53) | 12 | 78 | BF.75X2LG6.5-C | BF.75X2WH6.5-C | \$168 |
| 1" x 1 1/2" | 1.14"(29) | 1.61"(41) | 12 | 78 | BF1X1.5LG6.5-C | BF1X1.5WH6.5-C | \$157 |
| 1" x 2" | 1.14"(29) | 2.13"(54) | 12 | 78 | BF1X2LG6.5-C | BF1X2WH6.5-C | \$170 |
| 1" x 3" | 1.14"(29) | 3.11"(79) | 8 | 52 | BF1X3LG6.5-C | BF1X3WH6.5-C | \$141 |
| 1" x 4" | 1.18"(30) | 4.13"(105) | 8 | 52 | BF1X4LG6.5-C | BF1X4WH6.5-C | \$164 |
| 1 1/2" x 1 1/2" | 1.61"(41) | 1.61"(41) | 12 | 78 | BF1.5X1.5LG6.5-C | BF1.5X1.5WH6.5-C | \$175 |
| 1 1/2" x 2" | 1.61"(41) | 2.13"(54) | 8 | 52 | BF1.5X2LG6.5-C | BF1.5X2WH6.5-C | \$133 |
| 1 1/2" x 3" | 1.54"(39) | 3.11"(79) | 8 | 52 | BF1.5X3LG6.5-C | BF1.5X3WH6.5-C | \$158 |
| 1 1/2" x 4" | 1.69"(43) | 4.13"(105) | 8 | 52 | BF1.5x4LG6.5-C | BF1.5x4WH6.5-C | \$176 |
| 2" x 1 1/2" | 2.13"(54) | 1.61"(41) | 8 | 52 | BF2X1.5LG6.5-C | BF2X1.5WH6.5-C | \$130 |
| 2" x 2" | 2.13"(54) | 2.13"(54) | 8 | 52 | BF2X2LG6.5-C | BF2X2WH6.5-C | \$133 |
| 2" x 3" | 2.17"(55) | 3.11"(79) | 8 | 52 | BF2X3LG6.5-C | BF2X3WH6.5-C | \$164 |
| 2" x 4" | 2.20"(56) | 4.13"(105) | 4 | 26 | BF2X4LG6.5-C | BF2X4WH6.5-C | \$93 |
| 3" x 1 1/2" | 3.15"(80) | 1.61"(41) | 8 | 52 | BF3X1.5LG6.5-C | BF3X1.5WH6.5-C | \$164 |
| 3" x 2" | 3.07"(78) | 2.13"(54) | 8 | 52 | BF3X2LG6.5-C | BF3X2WH6.5-C | \$169 |
| 3" x 3" | 3.15"(80) | 3.15"(80) | 8 | 52 | BF3X3LG6.5-C | BF3X3WH6.5-C | \$198 |
| 3" x 4" | 3.15"(80) | 4.13"(105) | 4 | 26 | BF3X4LG6.5-C | BF3X4WH6.5-C | \$114 |
| 4" x 2" | 4.21"(107) | 2.13"(54) | 4 | 26 | BF4X2LG6.5-C | BF4X2WH6.5-C | \$98 |
| 4" x 3" | 4.21"(107) | 3.15"(80) | 4 | 26 | BF4X3LG6.5-C | BF4X3WH6.5-C | \$111 |
| 4" x 4" | 4.21"(107) | 4.09"(104) | 4 | 26 | BF4X4LG6.5-C | BF4X4WH6.5-C | \$130 |

D-series Closed Slot Wiring Duct

from **\$14.75** per stick

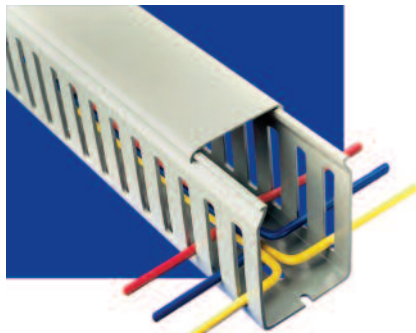


- Excellent cable retention
- Enhanced protection for installers
- Scoreline at base of finger allows removal without the need for tools
- Made of self extinguishing rigid PVC with UL94 Flammability rating V-0
- Service temp. 5°F to 140°F (-15°C to 60°C)
- 0.79" slot pitch, 0.31" slot width
- 25 sizes in gray (RAL 7030), white, or black
- Cover included with duct
- Dividers and many other accessories available

| Size (W x H) | External Dimen. | | Carton Qty. | | Gray | White | Price |
|-----------------|-----------------|------------|-------------------|-----------|------------------|------------------|-------|
| | W in (mm) | H in (mm) | Lengths (6.5 ft.) | Total ft. | Part Number | Part Number | |
| 1/2" x 1/2" | 0.67"(17) | 0.67"(17) | 24 | 156 | BD.5X.5LG6.5-C | BD.5X.5WH6.5-C | \$354 |
| 3/4" x 2" | 0.98"(25) | 2.09"(53) | 12 | 78 | BD.75X2LG6.5-C | BD.75X2WH6.5-C | \$198 |
| 1" x 3/4" | 1.14"(29) | 0.91"(23) | 12 | 78 | BD1X.75LG6.5-C | BD1X.75WH6.5-C | \$193 |
| 1" x 1 1/2" | 1.14"(29) | 1.61"(41) | 12 | 78 | BD1X1.5LG6.5-C | BD1X1.5WH6.5-C | \$203 |
| 1" x 2" | 1.14"(29) | 2.13"(54) | 12 | 78 | BD1X2LG6.5-C | BD1X2WH6.5-C | \$217 |
| 1" x 3" | 1.14"(29) | 3.11"(79) | 8 | 52 | BD1X3LG6.5-C | BD1X3WH6.5-C | \$183 |
| 1" x 4" | 1.18"(30) | 4.13"(105) | 8 | 52 | BD1X4LG6.5-C | BD1X4WH6.5-C | \$211 |
| 1 1/2" x 1 1/2" | 1.61"(41) | 1.61"(41) | 12 | 78 | BD1.5X1.5LG6.5-C | BD1.5X1.5WH6.5-C | \$212 |
| 1 1/2" x 2" | 1.61"(41) | 2.13"(54) | 8 | 52 | BD1.5X2LG6.5-C | BD1.5X2WH6.5-C | \$196 |
| 1 1/2" x 3" | 1.54"(39) | 3.11"(79) | 8 | 52 | BD1.5X3LG6.5-C | BD1.5X3WH6.5-C | \$225 |
| 1 1/2" x 4" | 1.69"(43) | 4.13"(105) | 8 | 52 | BD1.5x4LG6.5-C | BD1.5x4WH6.5-C | \$224 |
| 2" x 1" | 2.13"(54) | 1.10"(28) | 12 | 78 | BD2X1LG6.5-C | BD2X1WH6.5-C | \$282 |
| 2" x 1 1/2" | 2.13"(54) | 1.61"(41) | 8 | 52 | BD2X1.5LG6.5-C | BD2X1.5WH6.5-C | \$177 |
| 2" x 2" | 2.13"(54) | 2.13"(54) | 8 | 52 | BD2X2LG6.5-C | BD2X2WH6.5-C | \$174 |
| 2" x 3" | 2.17"(55) | 3.11"(79) | 8 | 52 | BD2X3LG6.5-C | BD2X3WH6.5-C | \$222 |
| 2" x 4" | 2.20"(56) | 4.13"(105) | 4 | 26 | BD2X4LG6.5-C | BD2X4WH6.5-C | \$127 |
| 3" x 1 1/2" | 3.15"(80) | 1.61"(41) | 8 | 52 | BD3X1.5LG6.5-C | BD3X1.5WH6.5-C | \$215 |
| 3" x 2" | 3.07"(78) | 2.13"(54) | 8 | 52 | BD3X2LG6.5-C | BD3X2WH6.5-C | \$229 |
| 3" x 3" | 3.15"(80) | 3.15"(80) | 8 | 52 | BD3X3LG6.5-C | BD3X3WH6.5-C | \$249 |
| 3" x 4" | 3.15"(80) | 4.13"(105) | 4 | 26 | BD3X4LG6.5-C | BD3X4WH6.5-C | \$146 |
| 4" x 2" | 4.21"(107) | 2.13"(54) | 4 | 26 | BD4X2LG6.5-C | BD4X2WH6.5-C | \$139 |
| 4" x 3" | 4.21"(107) | 3.15"(80) | 4 | 26 | BD4X3LG6.5-C | BD4X3WH6.5-C | \$163 |
| 4" x 4" | 4.21"(107) | 4.09"(104) | 4 | 26 | BD4X4LG6.5-C | BD4X4WH6.5-C | \$180 |
| 4" x 5" | 4.21"(107) | 5.12"(130) | 4 | 26 | BD4X5LG6.5-C | BD4X5WH6.5-C | \$214 |
| 5" x 3" | 5.16"(131) | 3.07"(78) | 4 | 26 | BD5X3LG6.5-C | BD5X3WH6.5-C | \$188 |

FREE Ground Shipping!
for online orders over \$500



FS-series Raceway (Solid Wall)

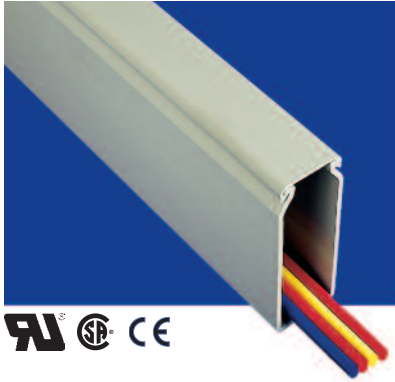


- Ideal where no break outs are required or side wall access is infrequent
- Complete cable protection
- Made of self extinguishing rigid PVC with UL94 Flammability rating V-0
- Service temp. 5°F to 140°F (-15°C to 60°C)
- 25 sizes in gray (RAL 7030), white, or black
- Cover included with duct
- Dividers and many other accessories available

from **\$14.75** per stick

| Size (W x H) | External Dimen. | | Carton Qty. | | Gray | | White | | Black | | Price |
|-----------------|-----------------|------------|-------------------|-----------|---------------------|---------------------|---------------------|-------------|-------------|--|--------------|
| | W in (mm) | H in (mm) | Lengths (6.5 ft.) | Total ft. | Part Number | Part Number | Part Number | Part Number | Part Number | | |
| 1/2" x 1/2" | 0.67"(17) | 0.67"(17) | 24 | 156 | BFS.5X.5LG6.5NM-C | BFS.5X.5WH6.5NM-C | BFS.5X.5BL6.5NM-C | | | | \$354 |
| 3/4" x 2" | 0.98"(25) | 2.09"(53) | 12 | 78 | BFS.75X2LG6.5NM-C | BFS.75X2WH6.5NM-C | BFS.75X2BL6.5NM-C | | | | \$198 |
| 1" x 3/4" | 1.14"(29) | 0.91"(23) | 12 | 78 | BFS1X.75LG6.5NM-C | BFS1X.75WH6.5NM-C | BFS1X.75BL6.5NM-C | | | | \$193 |
| 1" x 1 1/2" | 1.14"(29) | 1.61"(41) | 12 | 78 | BFS1X1.5LG6.5NM-C | BFS1X1.5WH6.5NM-C | BFS1X1.5BL6.5NM-C | | | | \$203 |
| 1" x 2" | 1.14"(29) | 2.13"(54) | 12 | 78 | BFS1X2LG6.5NM-C | BFS1X2WH6.5NM-C | BFS1X2BL6.5NM-C | | | | \$217 |
| 1" x 3" | 1.14"(29) | 3.11"(79) | 8 | 52 | BFS1X3LG6.5NM-C | BFS1X3WH6.5NM-C | BFS1X3BL6.5NM-C | | | | \$183 |
| 1" x 4" | 1.18"(30) | 4.13"(105) | 8 | 52 | BFS1X4LG6.5NM-C | BFS1X4WH6.5NM-C | BFS1X4BL6.5NM-C | | | | \$211 |
| 1 1/2"x1 1/2" | 1.61"(41) | 1.61"(41) | 12 | 78 | BFS1.5X1.5LG6.5NM-C | BFS1.5X1.5WH6.5NM-C | BFS1.5X1.5BL6.5NM-C | | | | \$212 |
| 1 1/2" x 2" | 1.61"(41) | 2.13"(54) | 8 | 52 | BFS1.5X2LG6.5NM-C | BFS1.5X2WH6.5NM-C | BFS1.5X2BL6.5NM-C | | | | \$196 |
| 1 1/2" x 3" | 1.54"(39) | 3.11"(79) | 8 | 52 | BFS1.5X3LG6.5NM-C | BFS1.5X3WH6.5NM-C | BFS1.5X3BL6.5NM-C | | | | \$225 |
| 1 1/2" x 4" | 1.69"(43) | 4.13"(105) | 8 | 52 | BFS1.5x4LG6.5NM-C | BFS1.5x4WH6.5NM-C | BFS1.5x4BL6.5NM-C | | | | \$224 |
| 2" x 1" | 2.13"(54) | 1.10"(28) | 12 | 78 | BFS2X1LG6.5NM-C | BFS2X1WH6.5NM-C | BFS2X1BL6.5NM-C | | | | \$282 |
| 2" x 1 1/2" | 2.13"(54) | 1.61"(41) | 8 | 52 | BFS2X1.5LG6.5NM-C | BFS2X1.5WH6.5NM-C | BFS2X1.5BL6.5NM-C | | | | \$177 |
| 2" x 2" | 2.13"(54) | 2.13"(54) | 8 | 52 | BFS2X2LG6.5NM-C | BFS2X2WH6.5NM-C | BFS2X2BL6.5NM-C | | | | \$174 |
| 2" x 3" | 2.17"(55) | 3.11"(79) | 8 | 52 | BFS2X3LG6.5NM-C | BFS2X3WH6.5NM-C | BFS2X3BL6.5NM-C | | | | \$222 |
| 2" x 4" | 2.20"(56) | 4.13"(105) | 4 | 26 | BFS2X4LG6.5NM-C | BFS2X4WH6.5NM-C | BFS2X4BL6.5NM-C | | | | \$127 |
| 3" x 1 1/2" | 3.15"(80) | 1.61"(41) | 8 | 52 | BFS3X1.5LG6.5NM-C | BFS3X1.5WH6.5NM-C | BFS3X1.5BL6.5NM-C | | | | \$215 |
| 3" x 2" | 3.07"(78) | 2.13"(54) | 8 | 52 | BFS3X2LG6.5NM-C | BFS3X2WH6.5NM-C | BFS3X2BL6.5NM-C | | | | \$229 |
| 3" x 3" | 3.15"(80) | 3.15"(80) | 8 | 52 | BFS3X3LG6.5NM-C | BFS3X3WH6.5NM-C | BFS3X3BL6.5NM-C | | | | \$249 |
| 3" x 4" | 3.15"(80) | 4.13"(105) | 4 | 26 | BFS3X4LG6.5NM-C | BFS3X4WH6.5NM-C | BFS3X4BL6.5NM-C | | | | \$146 |
| 4" x 2" | 4.21"(107) | 2.13"(54) | 4 | 26 | BFS4X2LG6.5NM-C | BFS4X2WH6.5NM-C | BFS4X2BL6.5NM-C | | | | \$139 |
| 4" x 3" | 4.21"(107) | 3.15"(80) | 4 | 26 | BFS4X3LG6.5NM-C | BFS4X3WH6.5NM-C | BFS4X3BL6.5NM-C | | | | \$163 |
| 4" x 4" | 4.21"(107) | 4.09"(104) | 4 | 26 | BFS4X4LG6.5NM-C | BFS4X4WH6.5NM-C | BFS4X4BL6.5NM-C | | | | \$180 |
| 4" x 5" | 4.21"(107) | 5.12"(130) | 4 | 26 | BFS4X5LG6.5NM-C | BFS4X5WH6.5NM-C | BFS4X5BL6.5NM-C | | | | \$214 |
| 5" x 3" | 5.16"(131) | 3.07"(78) | 4 | 26 | BFS5X3LG6.5NM-C | BFS5X3WH6.5NM-C | BFS5X3BL6.5NM-C | | | | \$188 |

Betaduct Accessories

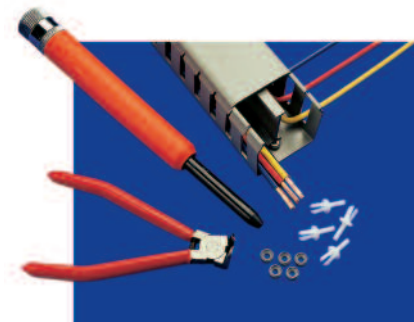

Spare Cover

| Size (W x H) | Carton Qty. | | Gray | White | Black | Blue | Price |
|-----------------|-------------------|-----------|-------------|-------------|-------------|-------------|--------------|
| | Lengths (6.5 ft.) | Total ft. | Part Number | Part Number | Part Number | Part Number | |
| 1/2" | 12 | 78 | BC.5LG6.5 | BC.5WH6.5 | BC.5BL6.5 | N/A | \$50 |
| 3/4" | 12 | 78 | BC.75LG6.5 | BC.75WH6.5 | BC.75BL6.5 | N/A | \$61 |
| 1" | 12 | 78 | BC1LG6.5 | BC1WH6.5 | BC1BL6.5 | BC1B6.5 | \$65 |
| 1 1/2" | 12 | 78 | BC1.5LG6.5 | BC1.5WH6.5 | BC1.5BL6.5 | BC1.5B6.5 | \$69 |
| 2" | 12 | 78 | BC2LG6.5 | BC2WH6.5 | BC2BL6.5 | BC2B6.5 | \$88 |
| 3" | 12 | 78 | BC3LG6.5 | BC3WH6.5 | BC3BL6.5 | BC3B6.5 | \$120 |
| 4" | 6 | 39 | BC4LG6.5 | BC4WH6.5 | BC4BL6.5 | BC4B6.5 | \$83 |
| 5" | 6 | 39 | BC5LG6.5 | BC5WH6.5 | BC5BL6.5 | N/A | \$102 |

Dividers

| P/N | Description | Carton Qty. | Price |
|----------|------------------------------------|-------------|-------------|
| BD2LG6.5 | 2" Divider, 6.5 feet length, Gray | 4 | \$73 |
| BD2BL6.5 | 2" Divider, 6.5 feet length, Black | 4 | \$73 |
| BD3LG6.5 | 3" Divider, 6.5 feet length, Gray | 4 | \$80 |
| BD3BL6.5 | 3" Divider, 6.5 feet length, Black | 4 | \$80 |

Washers / Rivets / Tools

| P/N | Description | Carton Qty. | Price |
|-------|------------------------------------|-------------|--------------|
| BW-1 | Insulating Washers | 50 | \$25 |
| BR-1 | Rivets (Small) - 1/2" W Duct | 100 | \$21 |
| BR-2 | Rivets (Large) - 3/4" W - 5"W Duct | 100 | \$42 |
| BSC-1 | Side Cutter | 1 | \$250 |
| BRV-1 | Rivetter | 1 | \$287 |